

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 982 374 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
01.03.2000 Bulletin 2000/09

(51) Int. Cl.<sup>7</sup>: **C09B 67/22**, C09B 62/507,  
D06P 1/384

(21) Application number: 99116260.3

(22) Date of filing: 18.08.1999

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: 27.08.1998 US 141114

(71) Applicant:  
**DyStar Textilfarben GmbH & Co. Deutschland**  
**KG**  
**60318 Frankfurt am Main (DE)**

(72) Inventor:  
**Steckelberg, Joachim, Dr.**  
**65719 Hofheim (DE)**

(54) **Black dye mixtures of fiber-reactive azo dyes and use thereof for dyeing hydroxy-and/or carboxamido-containing fiber material**

(57) A dye mixture comprising one or more disazo dyes composed of 1-amino-3,6-disulfo-8-naphthol as the coupling component and of two diazo components of the aniline series containing each a fiber-reactive group of the vinylsulfone series, one or more monoazo dyes composed of a sulfo-substituted 2-amino-naphthalene as coupling component and a diazo component of the aniline series containing a fiber-reactive group of the vinylsulfone series, and optionally one or two monoazo dyes with 1-amino-3,6-disulfo-8-naphthol as a coupling component to which is coupled in the ortho-position to the amino group a diazo component of the aniline series substituted by a fiber-reactive group of the vinylsulfone series. The dye mixtures yield on hydroxy- and/or carboxamido-containing fiber, materials, such as cellulose fibers, in particular cotton, or on, for example, wool and synthetic polyamide fibers, deep black dyeings.

**EP 0 982 374 A1**




## Description

[0001] The present invention relates to the field of fiber-reactive dyes.

[0002] Black-dyeing mixtures of fiber-reactive dyes are known from U.S. Patents Nos. 5,445,654 and 5,611,821 as well as from Korean Patent Application Publication No. 94-2560. However, these dye mixtures have deficiencies.

[0003] With the present invention, deep black-dyeing dye mixtures of improved properties have unexpectedly been found, containing an orange-dyeing dyestuff which is structurally highly different from the corresponding orange- or yellow-dyeing dyestuffs in the prior art black-dyeing dye mixtures.

[0004] The dye mixtures of the invention comprise one or more, such as one, two or three, disazo dyes conforming to the general formula (1), one or more, such as one, two or three, monoazo dyes conforming to the general formula (2) and optionally one or two monoazo dyes conforming to the general formula (3), defined below, the dye, respectively dyes, of the general formula (1) or of the general formulae (1) and (3) being present in the mixture in an amount of from 50 to 95 % by weight, preferably of from 60 to 80 % by weight, and the dye, respectively dyes, of the general formula (2) being present in the dye mixture in an amount of from 5 to 50 % by weight, preferably of from 20 to 40 % by weight, while the dyes of the formulae (1) and (3), if a dye or dyes of the general formula (3) is present in the dye mixture, are present in relation to one another of 99.5 % to 94 % in respect of the disazo dye(s) of formula (1) and of 0.5 to 6 % by weight in respect of the monoazo dye(s) of formula (3), calculated on the total amount of the dyes of formulae (1) and (3).

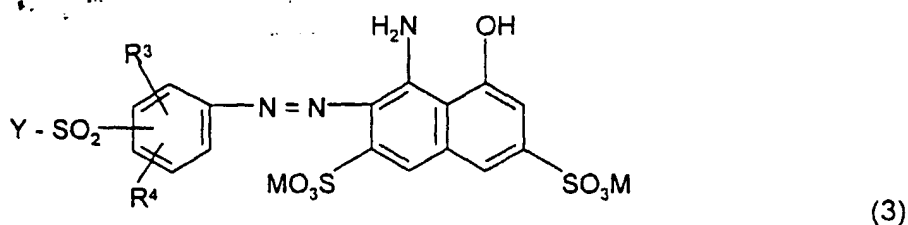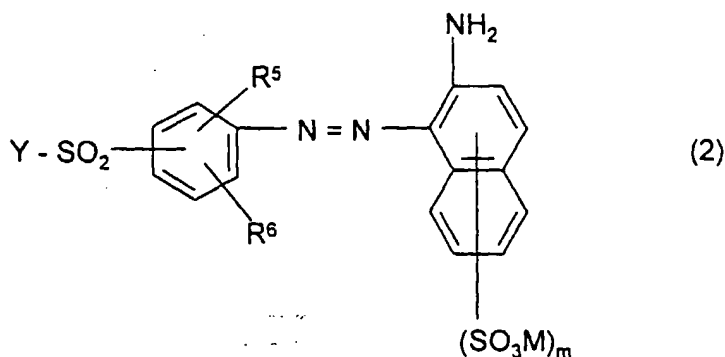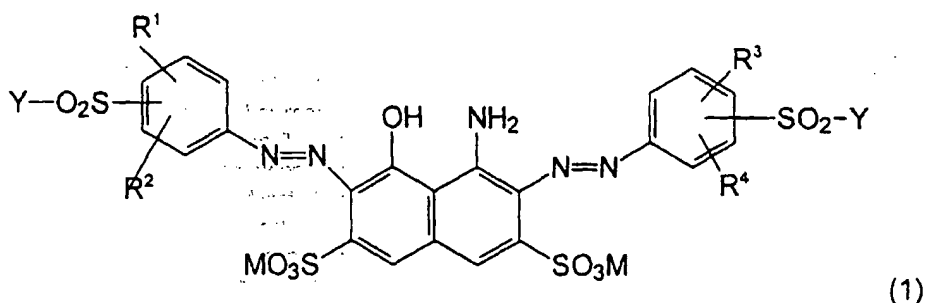

[0005] The meanings of the symbols in the formulae (1) to (3) are as follows:

- $R^1$  is hydrogen, methyl, ethyl, methoxy, ethoxy, hydroxy, sulfo or carboxy, preferably methoxy or hydrogen and in particular hydrogen,  
 $R^2$  is hydrogen, methyl, ethyl, methoxy, ethoxy, sulfo or carboxy, preferably hydrogen,  
 $R^3$  is hydrogen, methyl, ethyl, methoxy, ethoxy, hydroxy, sulfo or carboxy, preferably methoxy or hydrogen and in particular hydrogen,  
 $R^4$  is hydrogen, methyl, ethyl, methoxy, ethoxy, sulfo or carboxy, preferably hydrogen,  
 $R^5$  is hydrogen, methyl, ethyl, methoxy, ethoxy, hydroxy, sulfo or carboxy, preferably methoxy or hydrogen and in particular hydrogen,  
 $R^6$  is hydrogen, methyl, ethyl, methoxy, ethoxy, sulfo or carboxy, preferably hydrogen,  
 $Y$  is in each instance, independently of the others, vinyl or is ethyl which is substituted in the  $\beta$ -position by a substituent which is eliminated by the action of an alkali, forming the vinyl group, such as chlorine, thiosulfato, sulfato, alkanoyloxy of 2 to 5 carbon atoms, such as acetyloxy, phosphato, sulfobenzoyloxy and p-toluylsulfonyloxy, and  $Y$  is preferably vinyl,  $\beta$ -chloroethyl,  $\beta$ -thiosulfatoethyl or  $\beta$ -sulfatoethyl and is in particular preferably vinyl or  $\beta$ -sulfatoethyl;  
 $M$  is hydrogen or an alkali metal, such as lithium, sodium and potassium;  
 $m$  is the number 1 or 2;


the groups  $-SO_2-Y$  are preferably bonded to the benzene ring meta or preferably para to the azo group.

[0006] Both in the formulae mentioned above and in those below the individual formula members, both with different and with the same designation within a formula, can within the scope of their definition have meanings which are the same as or different from one another.

[0007] The groups "sulfo", "thiosulfato", "carboxy", "phosphato" and "sulfato" include both the acid form and the salt form of these groups. Accordingly, sulfo groups are groups of the formula  $-SO_3M$ , thiosulfato groups are groups of the formula  $-S-SO_3M$ , carboxy groups are groups of the formula  $-COOM$ , phosphato groups are groups of the formula  $-OPO_3M_2$  and sulfato groups are groups of the formula  $-OSO_3M$ , in which  $M$  is defined as above.


[0008] The dyes according to the general formula (1) are known from the U.S. Patents Nos. 2,657,205, 3,387,914, 4,072,463 and 4,257,770 and the dyes of the general formula (3), for example, from European Patent Application Publication No. 0,832,939. The dyes of the general formula (2) are known from German Offenlegungsschrift No. 19 11 427.

[0009] The dye mixtures according to the invention may additionally comprise a red shading dye in an amount of up to 10 % by weight, preferably of up to about 5 % by weight. Known dyes of this type are for example monoazo dyes conforming to the formula (a)

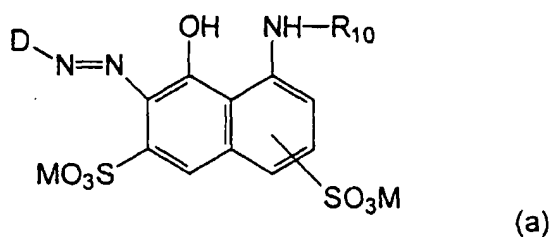

wherein

- $D$  is phenyl substituted by a group  $-SO_2-Y$  as defined above, such as 3-( $\beta$ -sulfatoethylsulfonyl)phenyl, 4-( $\beta$ -sulfatoethylsulfonyl)phenyl, 3-vinylsulfonylphenyl or 4-vinylsulfonylphenyl,  
 $M$  is defined above and  
 $R_{10}$  is acetyl, benzoyl or carboxybenzoyl or a group of the formula (b)

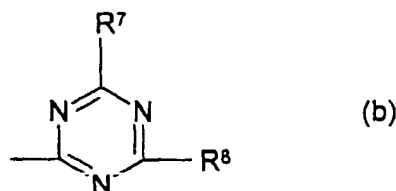

in which

$R^7$  and  $R^8$  are each, independently from one another, fluorine, chlorine, methoxy, ethoxy, alkylamino of 1 to 4 carbons, dialkylamino with alkyls of 1 to 4 carbon atoms, phenylamino or phenylamino substituted in the phenyl by 1 or 2 substituents, such as methyl, ethyl, methoxy, ethoxy, carboxy, sulfo, chlorine and aminocarbonyl,  $R^7$  preferably being fluorine and chlorine and  $R^8$  preferably being optionally substituted phenylamino as mentioned above.

15




[0010] The dyes of the general formulae (1), (2) and (3), in particular if those corresponding to the same general formula, have the same chromophore, can have, within the meaning of Y, structurally different fiber-reactive groups  $-SO_2-Y$ . In particular, the dye mixture can contain dyes of the same chromophore conforming to the formula (1) and/or dyes of the same chromophore conforming to formula (2) and optionally likewise of the general formula (3) in which the fiber-reactive groups  $-SO_2-Y$  are partly vinylsulfonyl groups and partly groups in which Y is a  $\beta$ -ethyl substituted group as defined above, such as  $\beta$ -chloroethylsulfonyl,  $\beta$ -thiosulfatoethylsulfonyl or, preferably,  $\beta$ -sulfatoethylsulfonyl groups. If the dye mixtures contain the respective dye components in the form of a vinylsulfonyl dye, the proportion of the respective vinylsulfonyl dye to the respective dye with Y being a  $\beta$ -ethyl substituted groups as defined above, such as a  $\beta$ -chloro- or  $\beta$ -thiosulfato- or  $\beta$ -sulfatoethyl-sulfonyl dye, will be up to about 30 mol-%, based on the respective dye chromophore. Preference is here given to the dye mixtures in which the proportion of vinylsulfonyl dye to said  $\beta$ -ethyl substituted dye, such as  $\beta$ -sulfatoethylsulfonyl dye is in terms of the molar ratio between 5 : 95 and 30 : 70.

20

25

[0011] Radicals of the formulae (4), (5) and (6)

30

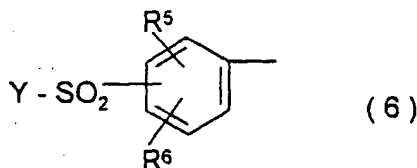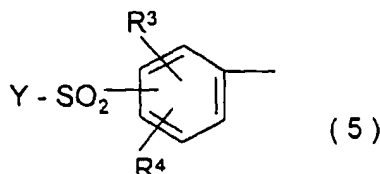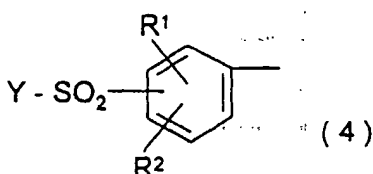




in the dyes of formulae (1), (2) and (3) are, for example, 2-( $\beta$ -sulfatoethylsulfonyl)phenyl, 3-( $\beta$ -sulfatoethylsulfonyl)phenyl, 3- or 4-vinylsulfonylphenyl, 4-( $\beta$ -sulfatoethylsulfonyl)phenyl, 2-carboxy-5-( $\beta$ -sulfatoethylsulfonyl)phenyl, 4-methoxy-3-( $\beta$ -sulfatoethylsulfonyl)-phenyl, 2-ethoxy-4- or -5-( $\beta$ -sulfatoethylsulfonyl)phenyl, 2-methyl-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl, 2-methoxy-5- or -4-( $\beta$ -sulfatoethylsulfonyl)phenyl, 2,4-diethoxy-5-( $\beta$ -sulfatoethylsulfonyl)phenyl, 2,4-dimethoxy-5-( $\beta$ -sulfatoethylsulfonyl)phenyl, 2,5-dimethoxy-4-( $\beta$ -sulfatoethylsulfonyl)phenyl, 2-methoxy-5-methyl-4-( $\beta$ -sulfatoethylsulfonyl)phenyl, 2- or 3- or 4-( $\beta$ -thiosulfatoethylsulfonyl)phenyl, 2-methoxy-5-( $\beta$ -thiosulfatoethylsulfonyl)phenyl, 2-sulfo-4-( $\beta$ -phosphatoethylsulfonyl)phenyl, 2-sulfo-4-vinylsulfonylphenyl and 3- or 4-( $\beta$ -acetoxylethylsulfonyl)phenyl and their corresponding vinylsulfonyl derivatives.

50

55

[0012] Preference is further given to the dye mixtures according to the invention, in which the formula members  $R^1$ ,  $R^2$ ,  $R^3$  and  $R^4$  as well as  $R^5$  and  $R^6$  are each hydrogen and the formula members Y are each, independently of one another, vinyl or  $\beta$ -sulfatoethyl. The dye mixtures according to the invention thus represent in particular mixtures of one

or more, such as one, two or three, preferably one or two, disazo dyes conforming to the general formula (1A), one or more monoazo dyes, such as one, two or three, preferably one or two, monoazo dyes conforming to the general formula (2A) and optionally one or two monoazo dyes conforming to the general formula (3A)

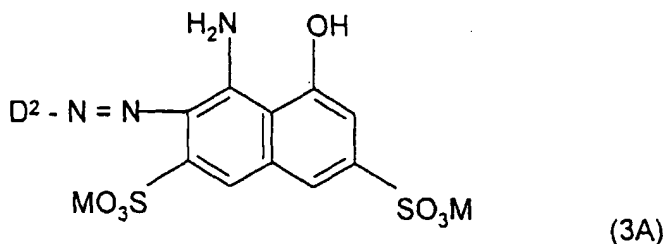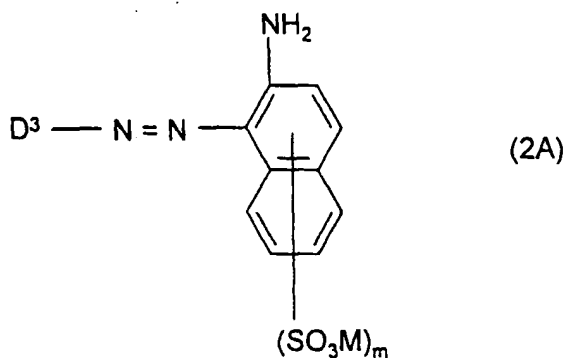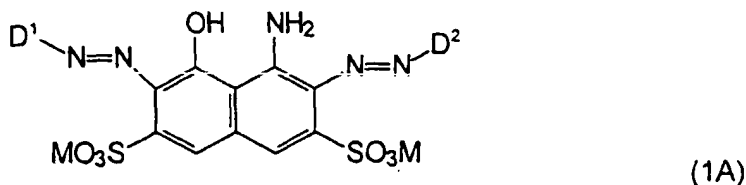


where M is as defined above and D<sup>1</sup>, D<sup>2</sup> and D<sup>3</sup> are each independently of the others 3-vinylsulfonylphenyl, 4-vinylsulfonylphenyl, 3-(β-sulfatoethylsulfonyl)phenyl or 4-(β-sulfatoethylsulfonyl)phenyl in the dye weight-ratios which have been given above for the corresponding formulae (1), (2) and (3), and if vinylsulfonyl as well as β-sulfatoethylsulfonyl groups are present in the dye mixtures the molar ratio between the vinylsulfonyl portions and the β-sulfatoethylsulfonyl portions are in a molar ratio between 5 : 95 and 30 : 70. In particular, the formula members D<sup>1</sup>, D<sup>2</sup> and D<sup>3</sup> have the same meaning.

[0013] The dye mixtures of the invention can be present as a preparation in solid or liquid (dissolved) form. In solid form they generally contain the electrolyte salts customary in the case of water-soluble and in particular fiber-reactive dyes, such as sodium chloride, potassium chloride and sodium sulfate, and also the assistants customary in commercial dyes, such as buffer substances capable of establishing a pH in aqueous solution between 3 and 7, such as sodium acetate, sodium borate, sodium bicarbonate, sodium dihydrogenphosphate and disodium hydrogenphosphate, small amounts of siccatives or, if they are present in liquid, aqueous solution (including the presence of thickeners of the type customary in print pastes), substances which ensure the permanence of these preparations, for example mold preventatives.


[0014] If the dye mixtures take the form of dye powders, they contain, as a rule, 10 to 80 % by weight, based on the dye powder or preparation, of a strength-standardizing colorless diluent electrolyte salt, such as those mentioned above. These dye powders may in addition contain the abovementioned buffer substances in a total amount of up to 5

%, based on the dye powder. If the dye mixtures of the invention are present in aqueous solution, the total dye content of these aqueous solutions is up to about 50 % by weight, the electrolyte salt content of these aqueous solutions preferably being below 10 % by weight, based on the aqueous solutions (liquid preparations) can in general contain the abovementioned buffer substances in an amount of up to 5 % by weight, preferably up to 2 % by weight.


[0015] The dye mixtures of the invention can be obtained in a conventional manner, for instance by mechanically mixing the individual dyes in the required proportions or by chemical synthesis by means of the customary diazotization and coupling reactions using appropriate mixtures of the diazo and coupling components in a manner familiar to those skilled in the art and the necessary proportions. One option is for example to prepare aqueous solutions of the two coupling components 1-amino-8-naphthol-3,6-disulfonic acid and a sulfo-substituted 2-amino-naphthalene and of the aniline compounds of the formulae (7), (8) and (9) as diazo components



(7)



(8)



(9)

where  $R^1$ ,  $R^2$ ,  $R^3$ ,  $R^4$ ,  $R^5$ ,  $R^6$  and Y are each as defined above, in the same reaction batch in appropriate proportions, diazotizing these aniline compounds in a conventional manner in a strongly acid medium and carrying out the first coupling reaction of the 1-amino-8-naphthol-3,6-disulfonic acid first at a pH of below 1.5 and thereafter the second coupling reaction with the monoazo dye of formula (3) produced to form the disazo dye conforming to the formula (1) as well as to form the monoazo dye of formula (2) at a pH of between 3 and 6.5 and of a temperature of 10 to 20°C. A further embodiment to synthesize the dye mixture according to the invention by chemical reaction is, for example, to diazotize, in the same reaction batch, aniline compounds of the general formulae (7) and (8) with 1-amino-8-naphthol-3,6-disulfonic acid, as mentioned above, at a pH of below 1.5 and at a temperature of 10 to 20°C, thereafter slowly adding an alkaline reacting agent, such as sodium carbonate, to adjust a pH of between 3 and 6, thus causing the second coupling reaction to form the disazo dye of formula (1), and then adding an aqueous solution of a sulfo-substituted 2-amino-naphthalene as the coupling component as well as an aqueous solution or suspension of the diazotized aniline of general formula (9) while maintaining the pH of 3 to 6.5 and at a temperature of 10 to 20°C, to form the monoazo dye of the general formula (2).

[0016] The dye mixtures according to the invention thus obtained can be isolated from the solution by the conventional manner, for example by salting out with an electrolyte salt, such as sodium chloride, potassium chloride or lithium chloride, or by spray-drying.

[0017] Dye mixtures of the invention in which the dye chromophores contain for example not only a  $\beta$ -chloroethylsulfonfyl or  $\beta$ -thiosulfatoethylsulfonfyl or  $\beta$ -sulfatoethylsulfonfyl group but also proportions with vinylsulfonfyl groups cannot only be prepared by the abovementioned method but also using appropriate vinylsulfonfyl starting anilines by reacting the dye mixture in which Y is a  $\beta$ -chloroethyl,  $\beta$ -thiosulfatoethyl or  $\beta$ -sulfatoethyl radical, with an amount of alkali required for only part of these groups and converting part said  $\beta$ -substituted ethylsulfonfyl groups into vinylsulfonfyl groups. This measure is carried out by generally known methods of converting  $\beta$ -substituted ethylsulfonfyl groups into the vinylsulfonfyl group.

The dye mixtures of the instant invention are well suitable for dyeing (which includes printing) hydroxy- and/or carboxamido-containing fiber materials by the application and fixing methods numerously described in the art for fiber-reactive dyes, in deep black shades with good color build-up and good wash-off in respect of unfixed dye portions. Moreover, the dyeings obtained are readily dischargeable.

[0018] The present invention therefore also provides for use of the novel dye mixtures for dyeing (including printing) hydroxy- and/or carboxamido-containing fiber materials and processes for dyeing such fiber materials and processes for dyeing such materials using a dye mixture according to the invention by applying the dye mixture to the substrate in dissolved form and fixing the dyes on the fiber by the action of an alkali or by heating or both.

[0019] Hydroxy-containing materials are natural or synthetic hydroxy-containing materials, for example cellulose fiber

materials, including in the form of paper, or their regenerated products and polyvinyl alcohols. Cellulose fiber materials are preferably cotton but also other natural vegetable fibers, such as linen, hemp, jute and ramie fibers; regenerated cellulose fibers are for example staple viscose and filament viscose.

[0020] Carboxamido-containing materials are for example synthetic and natural polyamides and polyurethanes, in particular in the form of fibers, for example wool and other animal hairs, silk, leather, nylon-6,6, nylon-6, nylon-11, and nylon-4.

[0021] Application of the dye mixtures of the invention is by generally known processes for dyeing and printing fiber materials by the known application techniques for fiber-reactive dyes. Since the dyes of the dye mixtures according to the invention are highly compatible with one another, the dye mixtures of the invention are also advantageously useful in exhaust dyeing processes. Applied in this way for example to cellulose fibers from a long liquor ratio at temperatures between 40 and 105°C, optionally at temperatures up to 130°C, under superatmospheric pressure, and optionally in the presence of customary dyeing assistants with the use of acid-binding agents and optionally neutral salts, such as sodium chloride or sodium sulfate, they produce dyeings in very good color yields with excellent color build-up and consistent shade. One possible procedure is to introduce the material into the warm bath, gradually heat the bath to the desired dyeing temperature, and complete the dyeing process at that temperature. The neutral salts which speed up the exhaustion of the dyes can also if desired not be added to the bath until the actual dyeing temperature has been reached.

[0022] Similarly, the conventional printing processes for cellulose fibers, which can either be carried out in single-phase, for example by printing with a print paste containing sodium bicarbonate or some other acid-binding agent and the colorant, and subsequent steaming at from 100 to 103°C, or in two phases, for example by printing with a neutral or weakly acid print paste containing the colorant and subsequent fixation either by passing the printed material through a hot electrolyte-containing alkaline bath or by overpadding with an alkaline electrolyte-containing padding liquor and subsequent batching of this treated material or subsequent steaming or subsequent treatment with dry heat, produce strong prints with well defined contours and a clear white ground. Changing fixing conditions has only little effect on the outcome of the prints. Not only in dyeing but also in printing the degrees of fixation obtained with dye mixtures of the invention are very high. The hot air used in dry heat fixing by the customary thermofix processes has a temperature of from 120 to 200°C. In addition to the customary steam at from 101 to 103°C, it is also possible to use superheated steam and high pressure steam at up to 160°C.

[0023] Acid-binding agents responsible for fixing the dyes to cellulose fibers are for example water-soluble basic salts of alkali metals and of alkaline earth metals of inorganic or organic acids, and compounds which release alkali when hot. Of particular suitability are the alkali metal hydroxides and alkali metal salts of weak to medium inorganic or organic acids, the preferred alkali metal compounds being the sodium and potassium compounds. These acid-binding agents are for example sodium hydroxide, potassium hydroxide, sodium carbonate, sodium bicarbonate, potassium carbonate, sodium formate, sodium dihydrogenphosphate and disodium hydrogenphosphate.


[0024] Treating the dyes of the dye mixtures according to the invention with the acid-binding agents with or without heating bonds the dyes chemically to the cellulose fiber; especially the dyeings on cellulose, after they have been given the usual aftertreatment of rinsing to remove unfixed dye portions, show excellent wet fastness properties, in particular since the unfixed dye portions are readily washed off because of their good cold water solubility.

[0025] The dyeings of polyurethane and polyamide fibers are customarily carried out from an acid medium. The dye-bath may contain for example acetic acid and/or ammonium sulfate and/or acetic acid and ammonium acetate or sodium acetate to bring it to the desired pH. To obtain a dyeing of acceptable levelness it is advisable to add customary leveling assistants, for example based on a reaction product of cyanuric chloride with three times the molar amount of an aminobenzenesulfonic acid or aminonaphthalenesulfonic acid or based on a reaction product of for example stearylamine with ethylene oxide. In general the material to be dyed is introduced into the bath at a temperature of about 40°C and agitated therein for some time, the dye-bath is then adjusted to the desired weakly acid, preferably weakly acetic acid, pH, and the actual dyeing is carried out at temperature between 60 and 98°C. However, the dyeings can also be carried out at the boil or at temperatures up to 120°C (under superatmospheric pressure).

[0026] The Examples which follow illustrate the invention. Parts and percentages are by weight, unless otherwise stated. The parts by weight bear the same relation to parts by volume as the kilogram to the liter.


#### Example 1

[0027] 200 parts of an electrolyte-containing dye powder which contains the navy-dyeing disazo dye of the formula (A)

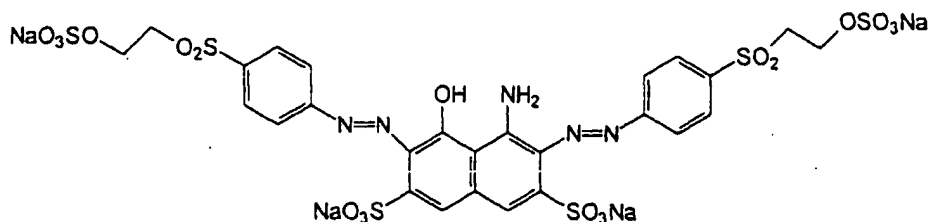

(A)

in a proportion of 50 % are mechanically mixed with 75 parts of an electrolyte-containing dye powder which contains the orange-dyeing monoazo of the formula (B)

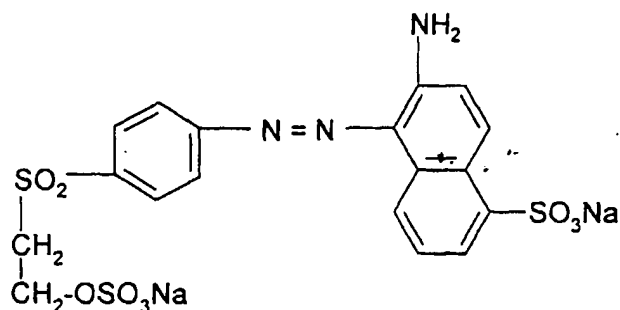

(B)

in a 70 % proportion. The resulting dye mixture according to the invention, when employed according to the the application and fixing methods customary in the art for fiber-reactive dyes, produces for example on cellulose fiber materials dyeings and prints in deep black shades.

#### Example 2


[0028] A dye mixture according to the invention is prepared by diazotizing a suspension of 281 parts of 4-(β-sulfa-toethylsulfonyl)aniline in 650 parts of ice-water and 180 parts of 30 % aqueous hydrochloric acid with 173 parts of 40 % strength aqueous sodium nitrite solution. 120 parts of 1-amino-8-naphthol-3,6-disulfonic acid is added and the first coupling is carried out at a pH between 1 and 1.3 and at a temperature below 20°C (the pH is maintained with about 50 parts of sodium bicarbonate). Thereafter 56 parts of 2-amino-naphthalene-5-sulfonic acid are added, and the pH is raised to 3 to 6.5 with sodium carbonate at a temperature below 30°C.

[0029] A deep black dye solution is obtained containing the dyes of formulae (A) and (B) mentioned in Example 1 in the ratio of 75 % : 25 %. This dye solution can be adjusted to pH 4.5 by adding 5 parts of a sodium phosphate buffer. By further diluting with water or by evaporating the solution, this liquid dye mixture can then be standardized to the desired strength for a liquid preparation. The dye mixture affords deep black shades on cellulose.

#### Example 3

[0030] 70 parts of an electrolyte-containing dye powder which contains the orange-dyeing monoazo dye of the above-mentioned formula (B) in a proportion of 70 %, 200 parts of an electrolyte-containing dye powder which contains the navy-dyeing disazo dye of the formula (A) in a proportion of 50 % and for the purpose of shading 20 parts of an electrolyte-containing dye powder which contains the red-dyeing monoazo dye of the formula (C)




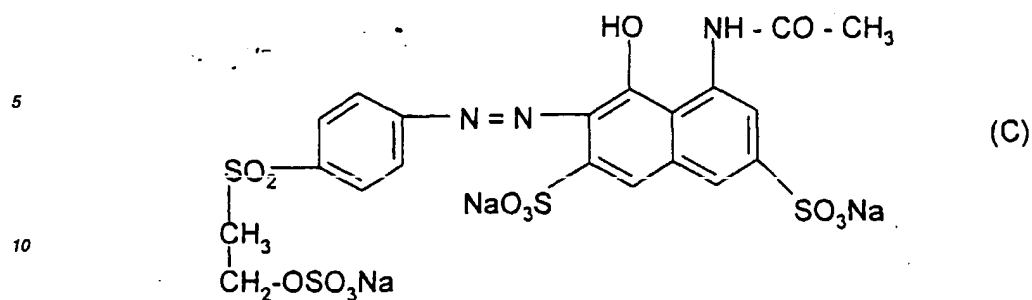


15 in a proportion of 50 % are mechanically mixed with one another. The dye mixture according to the invention, employed by the application and fixing methods customary in the art for fiber-reactive dyes, produces for example on cotton deep black dyeings with a slightly-reddish tint.

#### Examples 4 to 14

20

[0031] The Table Examples which follow describe further novel dye mixtures of the dyes conforming to the general formulae (1A) and (2B)

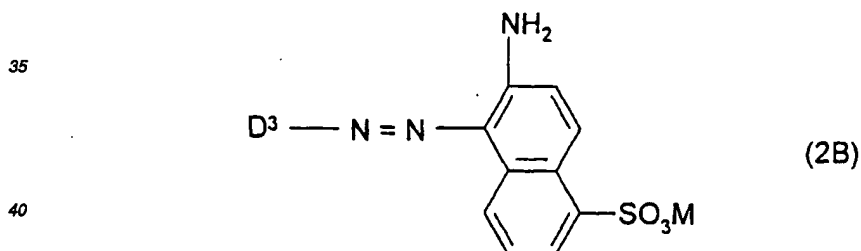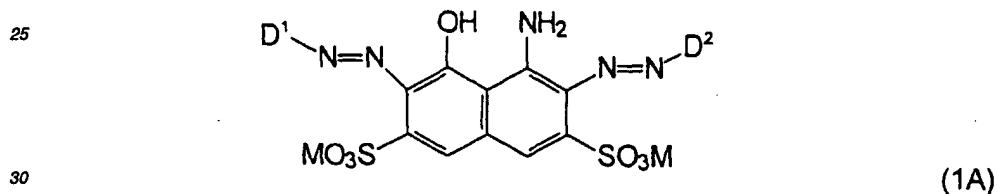

45 in terms of the components of these dyes (M has one of the abovementioned meanings) and the mixing ratios. When employed according to the application and fixing methods customary in the art for fiber-reactive dyes, these dye mixtures produce, for example, on cellulose fiber materials, deep black dyeings.

50




Ex.	Radical D <sup>1</sup>	Radical D <sup>2</sup>	Radical D <sup>3</sup>	Ratio of (1) : (2)	
4	2-sulfo-4-(β-sulfatoethylsulfonyl)-phenyl	4-(β-sulfatoethylsulfonyl)-phenyl	4-(β-sulfatoethylsulfonyl)-phenyl	70 : 30	
55	5	2-carboxy-4-(β-sulfatoethylsulfonyl)-phenyl	dito	dito	65 : 35

(continued)

Ex.	Radical D <sup>1</sup>	Radical D <sup>2</sup>	Radical D <sup>3</sup>	Ratio of (1) : (2)
6	2-methoxy-5-methyl-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	dito	dito	80 : 20
7	2,5-dimethoxy-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	dito	dito	75 : 25
8	4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	3-( $\beta$ -sulfatoethylsulfonyl)-phenyl	3-( $\beta$ -sulfatoethylsulfonyl)-phenyl	65 : 35
9	2-hydroxy-5-( $\beta$ -sulfatoethylsulfonyl)-phenyl	4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	2-methoxy-5-( $\beta$ -sulfatoethylsulfonyl)-phenyl	70 : 30
10	2-sulfo-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	2-methoxy-5-methyl-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	65 : 35
11	dito	dito	3-( $\beta$ -sulfatoethylsulfonyl)-phenyl	70 : 30
12	dito	dito	2-sulfo-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	60 : 40
13	2-methoxy-5-( $\beta$ -sulfatoethylsulfonyl)-phenyl	dito	2-carboxy-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	66 : 34
14	2-methoxy-5-( $\beta$ -sulfatoethylsulfonyl)-phenyl	dito	2-sulfo-4-( $\beta$ -sulfatoethylsulfonyl)-phenyl	63 : 37

### Claims

1. A dye mixture comprising one or more disazo dyes conforming to the general formula (1), one or more monoazo dyes conforming to the general formula (2) and optionally one or two monoazo dyes conforming to the general formula (3)

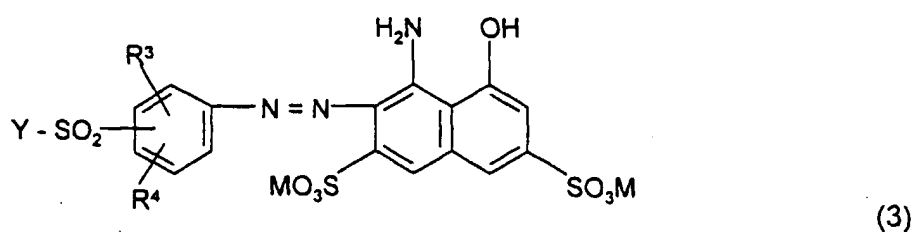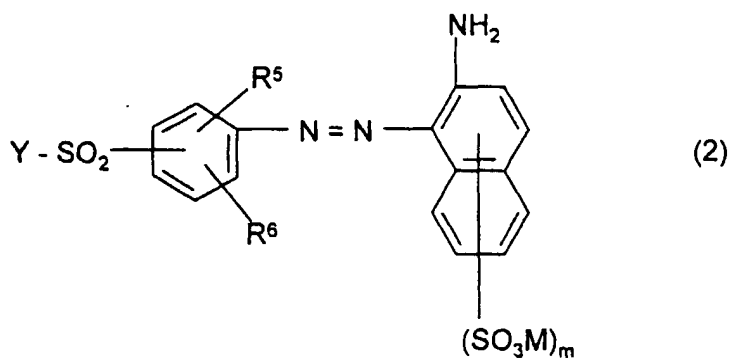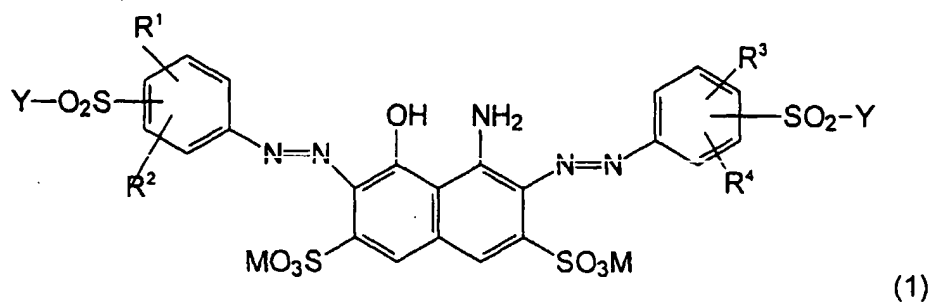

wherein:

R<sup>1</sup> is hydrogen, methyl, ethyl, methoxy, ethoxy, hydroxy, sulfo or carboxy;

R<sup>2</sup> is hydrogen, methyl, ethyl, methoxy, ethoxy, sulfo or carboxy;

R<sup>3</sup> is hydrogen, methyl, ethyl, methoxy, ethoxy, hydroxy, sulfo or carboxy;

R<sup>4</sup> is hydrogen, methyl, ethyl, methoxy, ethoxy, sulfo or carboxy;

R<sup>5</sup> is hydrogen, methyl, ethyl, methoxy, ethoxy, hydroxy, sulfo or carboxy;

R<sup>6</sup> is hydrogen, methyl, ethyl, methoxy, ethoxy, sulfo or carboxy;

Y is in each instance, independently of the others, vinyl or is ethyl which is substituted in the  $\beta$ -position by a substituent which is eliminated by the action of an alkali, forming the vinyl group;

M is hydrogen or an alkali metal;

m is the number 1 or 2;

the dye, respectively dyes, of the general formula (1) or of the general formulae (1) and (3) being present in the mixture in an amount of from 50 to 95 % by weight, and the dye, respectively dyes, of the general formula (2) being present in the dye mixture in an amount of from 5 to 50 % by weight) while the dyes of the formulae (1) and (3), if a dye or dyes of the general formula (3) being present in the dye mixture, are present in relation to one another of 99.5 % to 94 % in respect of the disazo dye(s) of formula (1) and of 0.5 to 6 % by weight in respect of the monoazo

dye(s) of formula (3), calculated on the total amount of the dyes of formulae (1) and (3).

2. A dye mixture according to claim 1 comprising one or more disazo dyes of formula (1) and optionally one or two monoazo dyes conforming to formula (3) in a total amount of from 60 to 80 % by weight and one or more monoazo dyes of formula (2) in an amount of from 20 to 40 % by weight.
3. A dye mixture according to claim 1, wherein R<sup>1</sup>, R<sup>3</sup> and R<sup>5</sup> are each independently of one another hydrogen or methoxy and R<sup>2</sup>, R<sup>4</sup> and R<sup>6</sup> are each hydrogen.
4. A dye mixture according to claim 1, wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, R<sup>4</sup>, R<sup>5</sup> and R<sup>6</sup> are each hydrogen.
5. A dye mixture according to claim 1, wherein Y is in each instance, independently of the others, vinyl or is ethyl substituted in the  $\beta$ -position by chlorine, thiosulfato, sulfato, alkanoyloxy of 2 to 5 carbon atoms, phosphato, sulfobenzoyloxy or p-toluylsulfonyloxy.
6. A dye mixture according to claim 1, wherein Y is in each instance, independently of the others, vinyl or  $\beta$ -sulfatoethyl.
7. A dye mixture according to claim 1, wherein the group(s) -SO<sub>2</sub>-Y being bonded to the benzene nucleus in meta- or para-position to the azo group(s).
8. A dye mixture according to claim 1, wherein the group(s) -SO<sub>2</sub>-Y being bonded to the benzene nucleus in para-position to the azo group(s).
9. Use of a dye mixture as defined and claimed in claim 1, for dyeing hydroxy-and/or carboxamido-containing fiber material.
10. A process for dyeing hydroxy- and/or carboxamido-containing fiber material, in which dyes are applied to the material and the dyes are fixed to the material by means of heat or with the aid of an alkali or by means of heat and with the aid on an alkali, which comprises employing as dyes a dye mixture as claimed and defined in claim 1.



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 11 6260

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	DE 196 20 415 A (EVERLIGHT CHEM IND CORP) 20 March 1997 (1997-03-20) * page 3, line 19 - page 5, line 65 *	1-10	C09B67/22 C09B62/507 D06P1/384
D	& US 5 445 654 A ---		
D,A	EP 0 832 939 A (DYSTAR TEXTILFARBEN GMBH & CO) 1 April 1998 (1998-04-01) * abstract *	1-10	
A	DATABASE WPI Section Ch, Week 199602 Derwent Publications Ltd., London, GB; Class E21, AN 1996-018304 XP002122686 & KR 9 402 560 B (KYUNGIN SYNTHETIC CORP), 25 March 1994 (1994-03-25) * abstract *	1-10	
A	DE 19 11 427 A (FARBWERKE HOECHST AG VORMALS MEISTER LUCIUS & BRÜNING) 17 September 1970 (1970-09-17) * page 1, line 1 - page 3, line 4; examples 2,... *	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C09B D06P
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>15 November 1999</b>	Examiner <b>Dauksch, H</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 6260

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-11-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19620415 A	20-03-1997	FR 2749314 A	05-12-1997
		GB 2313842 A,B	10-12-1997
		US 5611821 A	18-03-1997
EP 0832939 A	01-04-1998	DE 19640203 A	02-04-1998
		JP 11043624 A	16-02-1999
KR 9402560 B	25-03-1994	NONE	
DE 1911427 A	17-09-1970	AT 293567 B	15-09-1971
		BE 746968 A	07-09-1970
		CH 537971 A	31-07-1973
		FR 2034705 A	11-12-1970
		GB 1302519 A	10-01-1973

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82